


# TRENCHER

The strongest skid steer trencher with 36", 48", and 60" digging depths.




**EATON**  
Char-Lynn

<b>15-42 GPM</b> THREE MOTOR OPTIONS STANDARD & HIGHFLOW	<b>DIRECT DRIVE EATON® MOTOR</b>	<b>GREATER THAN 1500 LB</b> LOADER OPERATING CAPACITY
--	--------------------------------------	--

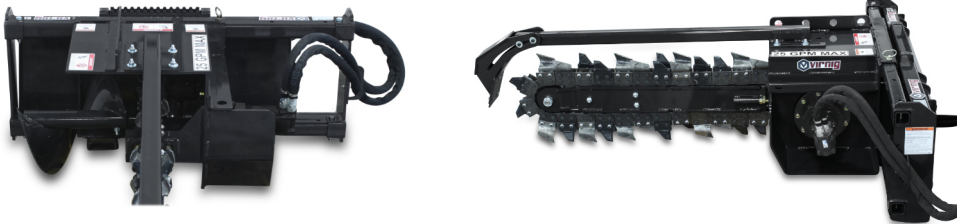

## CHAIN OPTIONS

<p><b>SINGLE STANDARD</b> Cup tooth every other station. Designed for soft to medium soils. For wet and sticky soils such as wet clay.</p>	<p><b>DOUBLE STANDARD</b> Cup tooth every station. Designed for soft to medium soils. For sandy, dry, and loosely-packed soils.</p>	<p><b>TERMINATOR</b> 50% cup teeth, 50% shark-style teeth with embedded carbide inserts. For soft to hard soils as well as rocky. Most versatile chain style.</p>	<p><b>ROCK &amp; FROST</b> 50% cup teeth, 50% replaceable, rotating carbide rock teeth. For rocky soils and frost.</p>
--	---	---	--

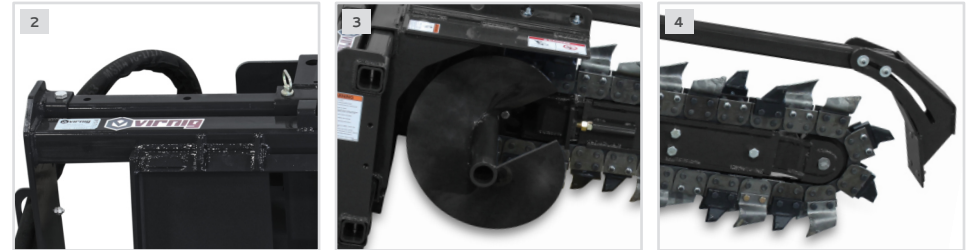

1. HD 50,000LB ANTI-BACK FLEX CHAIN MADE IN THE USA
2. THREE MANUAL SIDE-SHIFT POSITIONS FOR TRENCHING NEAR STRUCTURES
3. REMOVABLE AUGER CLEARS EXCAVATED SOIL AWAY FROM THE TRENCH
4. STANDARD CRUMBER KEEPS TRENCH BOTTOM CLEAN & SMOOTH
5. BI-DIRECTIONAL CHAIN ROTATION TO EXPEL OBJECTS

MODEL	TRN36	TRN48	TRN60
Dig Depth (in.)	36.0	48.0	60.0
Overall Width (in.)		58.5	
Overall Height (in.)		25.8	
Overall Length (in.)	69.7	84.9	95.7
Side Shift Travel (in.)		8.5 / 17.0	
Auger Diameter (in.)		17.3	
Auger Spoil Discharge Reach (in.)		20.0	
Optimal Trenching Angle (degrees)		60	
Recommended Flow Rate (GPM)	15-25 Standard Flow / 25-42 High Flow		
Approximate Weight (lbs)	1135*	1220*	1285*
Recommended Loader Capacity	Greater than 1500 lbs		

\*With Terminator chain.