

ANGLE BROOM


Available widths 60", 72", 84" & 96"

Direct drive Eaton® motor and exclusive self-centering swing linkage system for optimal sweeping.



Standard with 32" diameter poly/wire wafers; all-poly wafers also available.

15-25 GPM RECOMMENDED FLOW RATE	DIRECT DRIVE MOTOR	MANUAL & HYDRAULIC ANGLE AVAILABLE	GREATER THAN 1500 LB LOADER OPERATING CAPACITY
--	------------------------------	--	--




1. SWING LINKAGE SYSTEM SELF-CENTERS BROOM WHEN ANGLED

2. RECESSED & GUARDED MOTOR

3. OVERSIZED 2" GREASEABLE BEARING

4. REPLACE WAFERS EASILY WITHOUT DISCONNECTING HOSES. STANDARD WITH POLY/WIRE WAFERS.

5. STANDS FLIP DOWN TO PROTECT BRISTLES DURING STORAGE

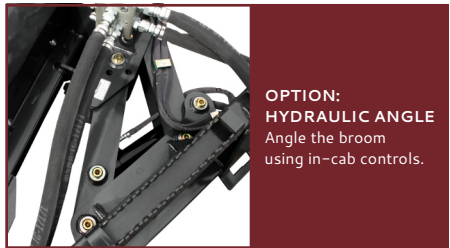

OPTION: HYDRAULIC ANGLE
Angle the broom using in-cab controls.



OPTION: DEFLECTOR
Bolts onto broom and covers an additional 30 degrees to limit flying debris.



	MODEL	VAB60	VAB72	VAB84	VAB96
Sweeping Width, Straight (in.)		60.0	72.0	84.0	96.0
Sweeping Width, Full Angle (in.)		53.5	64.2	74.8	85.5
Overall Width (in.)		69.1	81.1	93.1	105.1
Overall Width, Full Angle (in.)		73.4	83.9	94.3	105.4
Overall Height/Depth, Straight (in.)		34.0 / 74.0			
Broom Angle (degrees)		27			
Number of 32 Inch Diameter Wafers		29	35	41	47
Recommended Flow Rate (GPM)		15-25 Standard Flow Only			
Approximate Weight (lbs)		970	1035	1095	1160
Recommended Loader Capacity		Greater than 1500 lbs			