

## V50 OPEN FRONT ROTARY BRUSH CUTTER

Available widths 66", 72" & 78" & 84"

Cuts up to 6" diameter trees, and exposed blades allow faster cutting for a maintained finish.




Char-Lynn

Do not operate rotary brush cutter without a shatterproof cab on loader.

<p><b>6.0"</b> CUT CAPACITY</p>	<p><b>66" - 84"</b> FOUR CUT WIDTHS</p>	<p><b>14-42 GPM</b> FOUR MOTOR OPTIONS STANDARD &amp; HIGH FLOW</p>	<p><b>UP TO 275 LB</b> FLYWHEEL WEIGHT</p>	<p><b>UP TO 1770 LB</b> OVERALL WEIGHT</p>
-------------------------------------	---	---	--	--

DETAIL UNDER DECK  
(72" MODEL)

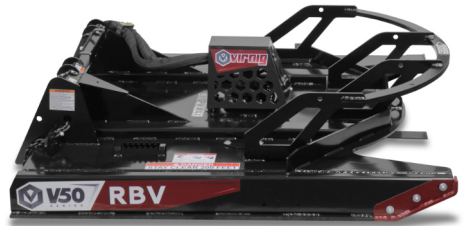



- 1. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVES
- 2. HYDRAULIC BRAKING STOPS FLYWHEEL WITHIN 10 SECONDS
- 3. STANDARD MOTOR GUARD & SPINDLE GUARD
- 4. ROUNDED FLYWHEEL WITH 3 DOUBLE-SIDED BLADES BOUNCES OFF STUMPS
- 5. REPLACEABLE FRONT SKID SHOES

MODEL	RBV66-O	RBV72-O	RBV78-O	RBV84-O
Cut Width (in.)	66.0	72.0	78.0	84.0
Overall Width (in.)	72.0	78.0	84.0	90.0
Overall Height (in.)			21.4	
Overall Depth (in.)	76.3	82.3	88.3	94.3
Deck Height (in.)			7.3	
Push Bar Height (in.)			20.4	
Minimum Cut Height (in.)			2.0	
Cutting Capacity, Diameter (in.)			6.0	
Deck Thickness: Top / Side (in.)			0.25 <sup>1</sup>	
Recommended Flow Rate (GPM)		14 - 25 Standard Flow, 25 - 42 High Flow		
Max Operating Pressure (PSI)		3500 Standard / 4100 High Flow		
Approximate Weight (lbs)	1465 <sup>2</sup>	1550 <sup>2</sup>	1625 <sup>2</sup>	1700 <sup>2</sup>
Recommended Loader Capacity		Greater than 1500 lbs		

<sup>1</sup>Material is Grade 50 Plate (50,000 PSI Minimum Yield Strength).  
<sup>2</sup>High Flow Motor Options Add Approximately 70 lbs to Model Weight.