


GEHL®

RS6-34 GEN:3 TELESCOPIC HANDLER

KEY FEATURES

- ✓ 6,000 lbs. (2722 kg) maximum lift capacity
- ✓ 34'3" (10.4 m) maximum lift height
- ✓ 4,000 lbs. (1815 kg) lift capacity to 34'3" (10.4 m)
- ✓ 74 hp (55 kW) Deutz diesel engine
- ✓ Four-wheel Drive/Four-Wheel Steer
- ✓ **ALL-NEW** Single Joystick control with F-N-R

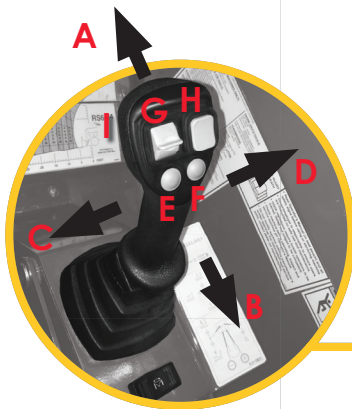

- A Boom Down
- B Boom Up
- C Boom Retraction
- D Boom Extension
- E Transmission Shift Down
- F Transmission Shift Up
- G Fork Tilt
- H Drive Direction – F-N-R
- I Auxiliary Hydraulics



RS6-34 GEN:3 TELESCOPIC HANDLER


SPECIFICATIONS

DIMENSIONS	Approximate Weight (kg)	15,100 lbs. (6850)
	Length - Less Forks (m)	16'0" (4.9)
	Width (m)	7'10" (2.4)
	Ground Clearance (mm)	14" (350)
	Wheelbase (m)	9'2" (2.8)
	Turn Radius (m)	12'6" (3.8)
	Overall Height (m)	7'10" (2.4)
	Frame Leveling	± 10°
	Fuel Capacity (L)	29 gal. (110)
TRANSMISSION	Transmission	Dana
	Type	3-Speed Powershift
	Max. Speed (km/h)	20.2 mph (32.5)
	Steering	4-Wheel, 2-Wheel, crab
	Brakes	4-Wheel
	Parking Brake	SAHR
ENGINE	Axles	Dana
	Engine	Deutz
	Model	TD 3.6
	Power (kW)	74 hp (55)
	Torque (Nm)	244 ft.-lbs (330)
	Aspiration	Turbocharged
	Speed	2300 rpm
HYDRAULICS	Tier	Tier IV
	Hydraulic Pump	Gear
	Pump Capacity (L/min)	29 gpm (110)
	System Pressure (bar)	3,000 psi (207)
PERFORMANCE	Hydraulic System Capacity (L)	29 gal. (110)
	Lift Capacity (kg)	6,000 lbs. (2722)
	Max. Lift Height(m)	34'3" (10.4)
	Capacity at Max. Lift Height (kg)	4,000 lbs. (1815)
	Max. Forward Reach (m)	23'3" (7.0)
	Capacity at Max. Forward Reach (kg)	900 lbs. (409)
Maximum Reach Below Grade	24" (610)	



STANDARD FEATURES

- Three (3) Steering Modes - Front Wheel, All Wheel and Cab
- 3-Speed Powershift Transmission
- DYNATTACH® Quick Attachment System
- Four Wheel Wet Disc Brakes
- Frame Leveling ±10° (Left or Right)
- Full Time Four Wheel Drive
- Left Hand Front Fender
- Planetary Axles with Open Center Differential
- Power Steering
- SAHR Parking Brake
- Transmission Clutch Cut-Out
- 12 Volt Electrical System
- Backup Alarm
- Backup Light
- Brake Lights
- Engine temperature, fuel and hourmeter gauges
- Deutz Turbocharged diesel engine
- Dual Element Air Filter with Restriction Indicator
- Engine Block Heater
- Glow Plug Cold Weather Start
- Automatic Self-Leveling Fork System
- Frame Level Switch
- Power Port
- Right-Hand Side Mounted Rear View Mirror
- Single Control Joystick with F-N-R and Transmission Speed Control

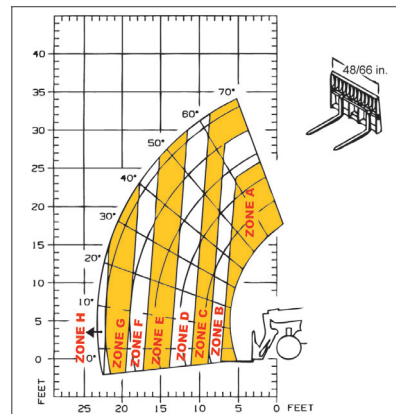

A	6,000 lbs. (2722 kg)	E	2,000 lbs. (907 kg)
B	5,000 lbs. (2268 kg)	F	1,500 lbs. (680 kg)
C	4,000 lbs. (1814 kg)	G	1,000 lbs. (454 kg)
D	3,000 lbs. (1361 kg)	H	900 lbs. (408 kg)

GEHL
gehl.com



One Gehl Way, West Bend, WI 53095

Phone: (262) 334-9461

SPECIFICATIONS ARE PRELIMINARY

Gehl reserves the right to add improvements or make changes in features and specifications at any time without notice or obligation.

Gehl reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly.