

V20 MINI SKID OPEN FRONT
ROTARY BRUSH CUTTER

Available widths 42" & 48"

Cuts up to 3" diameter trees, and exposed blades allow faster cutting for a maintained finish.



CHOOSE FROM THREE
MINI SKID MOUNTS:

- MINI UNIVERSAL
(All brands except
Bobcat® and ASV®)
- BOBCAT® Mini
- ASV® Mini*

NOTE: None of the above
are compatible with
universal skid steer mount.
*ASV® mini skid mount not
available for CBC42.



Always wear proper PPE (Personal Protective Equipment). If operating in cab enclosure do not operate without a shatterproof cab.


3.0" CUT CAPACITY	42" & 48" CUT WIDTHS	11-18 GPM ONE MOTOR OPTION STANDARD FLOW ONLY	UP TO 150 LB FLYWHEEL WEIGHT	UP TO 690 LB OVERALL WEIGHT
-----------------------------	------------------------------------	--	---	---------------------------------------

DETAIL UNDER DECK





1. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVES
2. HYDRAULIC BRAKING STOPS FLYWHEEL IN LESS THAN 10 SECONDS

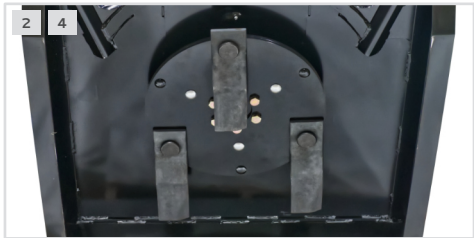

3. STANDARD MOTOR GUARD & SPINDLE GUARD
4. CIRCULAR FLYWHEEL WITH 3 UPDRAFT BLADES BOUNCES OFF STUMPS

MODEL	CBC42-O	CBC48-O
Cut Width (in.)	42.0	48.0
Overall Width (in.)	47.0	53.0
Overall Height (in.)	20.5	
Overall Depth (in.)	51.3	57.3
Deck Height (in.)	6.5	
Minimum Cut Height (in.)	2.0	
Cutting Capacity, Diameter (in.)	3.0	
Deck Thickness: Top / Side (in.)	0.19 / 0.19 ¹	
Recommended Flow Rate (GPM)	11 – 18	
Approximate Weight with Mini Universal Mount (in.)	590 ²	690 ^{2,3}
Recommended Loader Capacity	Greater than 590 lbs	

¹Material is Grade 50 Plate (50,000 PSI Minimum Yield Strength).
²Bobcat® mount adds 35 lbs to model weight, and ³ASV® mount adds approximately 40 lbs.